


Style 60-S Bell Joint Clamps

For repair of stab-type bell joints

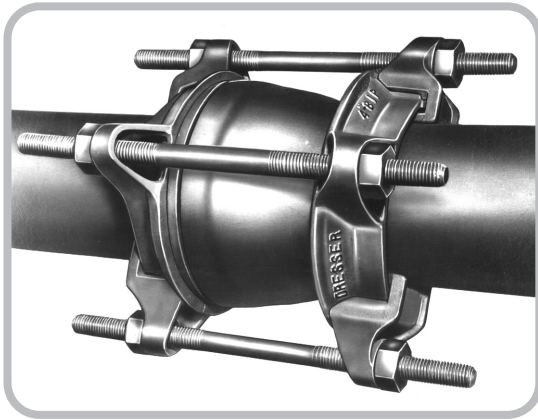

Dresser Style 60-S bell joint clamps are similar to the standard Style 60 clamp, but consist of two spigot rings rather than one spigot and one bell ring. This difference in design is necessary because most stab-type joints, including cast-iron pipe, have a long, tapered bell that has no shoulder for anchoring a bell ring.

Long studs are provided for adjustability to provide a close fit on both pipe bell and spigot ends. A large, special rubber compound gasket shuts off the leak when compressed, as the spigot rings are drawn up and the studs are tightened against the bell. Style 60-S clamps can be quickly installed with no interruption of service.




NSF61 and 372 Certified

Only products bearing the NSF Mark on the product, product packaging, and/or documentation shipped with the product are Certified.

Material Specifications

Spigot Rings	Ductile or Malleable Iron
Studs & Nuts	AWWA C111/A21.11
Gasket	Grade 27 Buna-S
Coating	Fusion-Bonded Epoxy

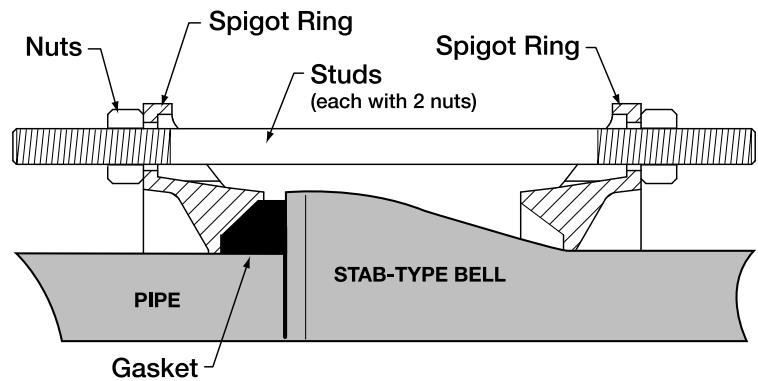

Style 60-S Clamp – Size Specification for 4" – 36"

Nominal Size (CIP)	Spigot Ring Part Number (2 per clamp)	Studs Number Diameter x Length	Approximate Ship Weight Ea. (lbs.)
4	160AO480	4 - 5/8 x 13	18
6	160AO690	6 - 5/8 x 13	27
8	160AO905	6 - 5/8 x 13	33
10	60B1110	8 - 5/8 x 13	43
12	160A1320	8 - 5/8 x 13	48
14	60A1530	9 - 5/8 x 13	71
16	60B1740	9 - 5/8 x 16	74
18	60A1950	12 - 5/8 x 16	91
20	60A2160	12 - 5/8 x 16	100
24	60D2580	12 - 5/8 x 16	115
30	60A3174	16 - 5/8 x 16	171
36	60B3830	20 - 5/8 x 16	247

Dimensions are in inches unless otherwise noted.

NOTE: Style 60-S Clamps can be used on caulked cast iron pipe joints for Class A, B, C and D C900 pipe sizes through 24"; Same pipe for Class A, B, and C in sizes 30" and 36".

SUPPLIED BY:



Anode Engineering Pty Ltd | Engineering Services
 P: 1800 446 400
 E: admin@anodeengineering.com
 www.anodeengineering.com

SUPPLIED BY:



Lordco New Zealand
 P: +64 4 939 3944
 E: sales@lordco.co.nz
 www.lordco.co.nz